

LED LANDSCAPE LIGHT

ZETA



Unilumin

TOGETHER, FOR A BRIGHTER FUTURE



UNILUMIN GROUP CO., LTD

HQ Address: 112 Yongfu Rd., Qiaotou Village, Fuyong Town, Baoan District, Shenzhen 518103 China
 Manufacturing Base: Unilumin Industrial Park, 6 North Lanjing Road Pingshan District, Shenzhen, China
 TEL: +86-0755-29918999 | FAX: +86-0755-29912092 | E-mail: ledlighting@unilumin.com
 www.unilumin.com | www.unilumin-lighting.com

The product designs and specifications are subject to change without prior notice.
 All rights reserved, copy is prohibited without the permission of Unilumin Group Co., Ltd.



Official Website



Facebook



Twitter



LinkedIn



Instagram

Published: October 2023

UNILUMIN GROUP CO., LTD



About Unilumin

Established in 2004, is a world-class LED lighting and display solution provider. As a key business of Unilumin Group, Unilumin Lighting has established a firm foothold in the LED lighting industry and has been a trusted global partner offering comprehensive lighting solutions and exceptional customer service. Our relentless dedication to R&D and customer satisfaction has positioned Unilumin as a top LED lighting brand, known for our worldwide presence and core competitive edges.

Why Choose Unilumin



16 Years of Outdoor Lighting Expertise



ISO/IEC 17025 Accredited LAB & Precise Automatic Production



Flexible Customization Services



Recognized by Clients in Over **80** Countries



Zeta Series

Zeta is an LED landscape light designed to cater to the lighting demands of modern urban environments. With power options between 20W and 80W, it offers flexibility to meet different lighting requirements. Additionally, Zeta combines tool-free maintenance convenience with expert light distribution, ensuring optimal illumination for city streets and enhancing road safety. Choose Zeta for outstanding lighting solutions and ease of service.

Features & Benefits

1. Parabolic appearance design, with design patent, enhance the charm of cities
2. Aluminum alloy + tempered glass shell, reliable and robust
3. Multiple mounting options for more lighting applications
4. Supports NEMA, ZHAGA interfaces and a variety of intelligent lighting controls
5. Integrated die-cast heat dissipation design for higher heat dissipation efficiency
6. Tool-free opening and maintenance, more convenient and faster
7. Professional roadway light distribution design to provide more perfect lighting performance

Application



Residential Street




Pedestrian Path



Park & Square



Tourist attraction



Reliable strength

Aluminum alloy + tempered glass shell
Robust and durable

Supreme lighting performance

High efficient LEDs with precise and various light distribution optics



Tool-free access design


Maximizes the ease of maintenance

Future-proof & smart-ready


Compatible with NEMA and Zhaga Interfaces




Light Distributions




UNI-YA06-1
Type II (UNI-618)




UNI-YA06-1
Type II (UNI-710)




UNI-YA06-1
Type II (UNI-711)



UNI-YA06-2
Type II (UNI-618)



UNI-YA06-2
Type II (UNI-710)




UNI-YA06-2
Type II (UNI-711)


5050 Light Source

| Structure | Power (W) | LED QTY (pcs) | Light Distribution | 4000K Ra70@Ta=25°C | |
|-------------------------|-----------|---------------|--------------------|----------------------|---------------|
| | | | | Luminaire Efficiency | Luminous Flux |
| Vertical installation | 20 | 24 | UNI-YA06-1 | 140 lm/W | 2800 lm |
| | 40 | 48 | | | 5600 lm |
| | 60 | 60 | | | 8400 lm |
| | 80 | 60 | | | 11200 lm |
| Horizontal installation | 20 | 24 | UNI-YA06-2 | 160 lm/W | 3200 lm |
| | 40 | 48 | | | 6400 lm |
| | 60 | 60 | | | 9600 lm |
| | 80 | 60 | | | 12800 lm |

Dimensions

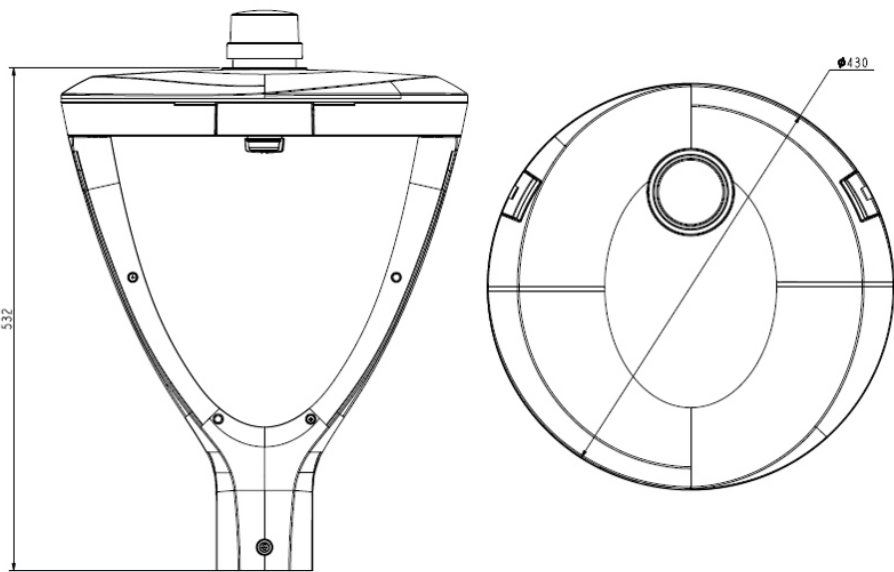

UNI-YA06-1

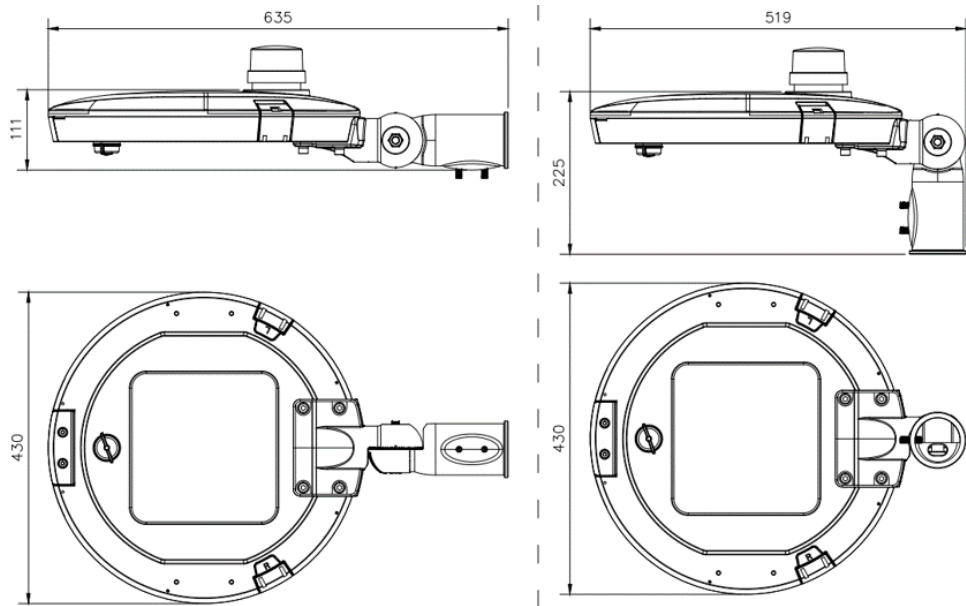

UNI-YA06-2

Parameters



| Product Model | | UNI-YA06-1 | | | | UNI-YA06-2 | | |
|------------------------|-----------------------------|------------|---------|-------|-------|--|-------|-------|
| Power (W) | 20 | 40 | 60 | 80 | 20 | 40 | 60 | 80 |
| Luminous Flux (lm) | 2900 | 5800 | 8700 | 11600 | 3200 | 6400 | 9600 | 12800 |
| Power Factor | ≥0.92 | ≥0.92 | ≥0.95 | ≥0.95 | ≥0.92 | ≥0.92 | ≥0.95 | ≥0.95 |
| Input Voltage | AC100~277V 50/60Hz | | | | | | | |
| LED | Osram 5050 | | | | | | | |
| Driver | Moso/Sosen/Inventronics D4i | | | | | | | |
| CCT | 3000K/4000K/5000K | | | | | | | |
| Luminaire Efficiency | 145lm/W | | 160lm/W | | | | | |
| CRI | 70 | | | | | | | |
| Working Temp. | -40°C~50°C | | | | | | | |
| Working Humidity | 10%~90%RH | | | | | | | |
| Storage Temp. | -40°C~55°C | | | | | | | |
| Housing Materials | Die-casting aluminum | | | | | | | |
| IP / IK | IP66/IK08 | | | | | | | |
| Life Span (Hrs) | 50,000 | | | | | | | |
| Max Projected Area (㎡) | 0.15 | | 0.16 | | | | | |
| Product Dimension (mm) | 430×430×532 | | | | | 519×430×225(vertical) 635×430×111(horizontal) | | |



| Product Model | | UNI-YA06-1 | | UNI-YA06-2 | |
|-------------------|--|------------|--|------------|--|
| Net Weight (kg) | | 6.033 | | 5.772 | |
| Gross Weight (kg) | | 9.524 | | 9.263 | |


Note: The tolerance of Luminous Flux is ±7%

Controller




Features

- Zigbee communication, auto-Mesh
- With standard NEMA 5 lines interface for easy installation
- Remote switch on/off, maximum internal 16A relay outputs
- With dimming interface: 0-10V (PWM could be customized)
- With current, voltage, power, power factor, electric energy remote reading functions
- With LED lamp failure detection function
- With initiative fault information reporting functions
- Lightning protection function
- IP65

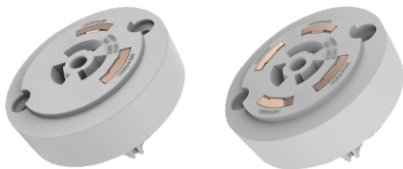

NEMA Socket 5PIN 7PIN

Optical control can be connected to 3/5/7PIN interface.

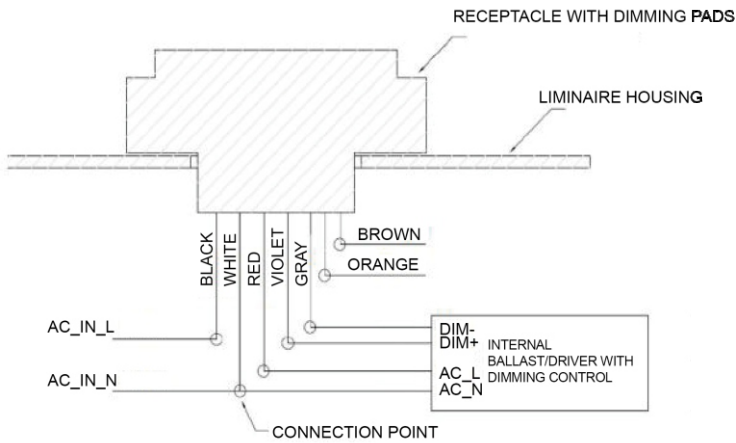

| Dimming mode | Output parameters | Explanation | Communication mode | Route pattern | Communication distance | Frequency | Frequency range | Communication rate |
|----------------|-------------------|---|--------------------|---------------|------------------------|-----------|-----------------|--------------------|
| Analog voltage | 0-10V/10mA | Preset 100% dimming for 10V, or 0V output | Zigbee | MESH | 200M (visual range) | 2.4GHz | 2.4GHz~2.485GHz | 250Kbps |

